



**FEATURES & APPLICATIONS**

**Illumination:**

- Ultra-Bright, Energy Efficient White LED Emergency Lighting.
- Adjustable High-Performance, Smooth, Chrome-Plated, Metallized Reflector and Acrylic, UV-Stabilized "Lightpipe" Lens for Optimal Light Distribution.
- Long-Life, Energy Efficient Red or Green LED Exit Sign Illumination.

**Electrical:**

- Dual 120/277 Voltage.
- Charge Rate/Power "ON" LED Indicator Light and Push-to-Test Switch for Mandated Code Compliance Testing.
- 4.8V Long-Life, Maintenance-Free, Rechargeable NiCd Battery.
- Internal Solid-State Transfer Switch Automatically Connects the Internal Battery to LED Board and Lightpipe for Minimum 90-minute Emergency Illumination.
- Fully Automatic Solid-State, Two-Rate Charger Initiates Battery Charging to Recharge a Discharged Battery in 24 hours.
- Remote Capable Standard: Can Connect up to Two Additional LED Remote Heads (3 Watt Maximum)

**Mounting:**

- EZ-Snap Mounting Canopy Included for Top or End Mount.
- Universal K/O Pattern on Back Plate for Wall Mount.

**Housing:**

- Injection-Molded, Engineering-Grade, 5VA Flame Retardant, High-Impact Resistant, Thermoplastic in White Finish.
- EZ Snap-Out Chevron Directional Indicators.
- Single or Double Face

**Warranty/Listing:**


- Five Year Warranty on All Electronics and Housing. Battery Pro-Rated for Five Years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for Damp Locations. (0°C-50°C)

**Lightpipe LED Exit & Emergency Combo**



EECXELPGB2RC

**DIMENSIONS**

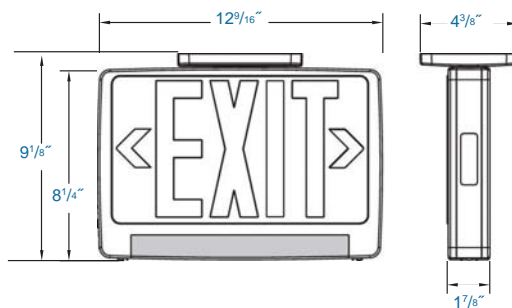

EECXELP

EXIT LIGHTS

**ORDER INFORMATION**

Catalog #	Housing	Lettering	Voltage
EECXELPRB2RC	White	Red	120/277
EECXELPGB2RC	White	Green	120/277

Specifications subject to change without notice.