



Halfmoon Wallpack - Up/Down Light



FEATURES & APPLICATIONS

Features:

Die Cast Housing, Textured White or Bronze Powdercoat Finish Over a Chromate Conversion Coating

Aluminum Reflector

Tempered Clear Flat Glass Lens for Down Light, Molded Oval Shape Glass Lens for Up Light

Socket:

HID: Porcelain 4KV Pulse Rated Medium Base Socket with Nickel Plated Screw Shell

PL: Plug-In Type, GX24Q-4

Mount Over a 4" Recessed Outlet Box Includes Easy-Hang "Two Hands Free" Wall Mounting Bracket

CSA Listed for Wet Locations

Applications:

- Warehouse Facilities
- Shipping and Receiving Areas
- Cold Storage Facilities
- Industrial Plants
- Commercial Buildings


Accessories Sold Separately



HMWP-UD



DIMENSIONS

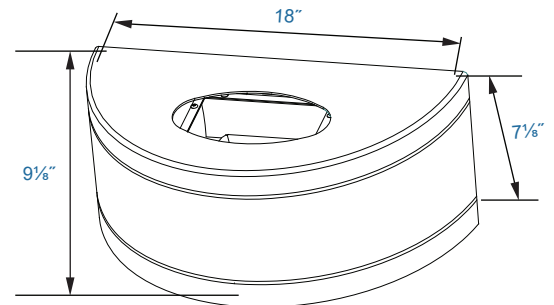

HMWP-UD

ORDER INFORMATION

Typical Ordering Number:
D-150w-PSMH-HMWP-UD-MT



1. Wattage/Lamp

Compact Fluorescent:

- D-52w-CFL
- D-64w-CFL
- D-84w-CFL

Pulse Start Metal Halide:

- D-50w-PSMH
- D-70w-PSMH
- D-100w-PSMH
- D-150w-PSMH

High Pressure Sodium:

- D-50w-HPS
- D-70w-HPS
- D-100w-HPS
- D-150w-HPS

2. Fixture Type

Halfmoon Wallpack - Up/Down Light:
HMWP-UD

3. Voltage

Multi-tap: **MT**
120v: **120**
120/277v: **120/277**
120-277v: **120-277**

4. Options


Photocell: **PC**
(Designate Voltage)
In-Line Fuse: **F**
(Designate Voltage)



**Halfmoon Wallpack -
Up/Down Light**

ACCESSORIES

PHOTOMETRICS

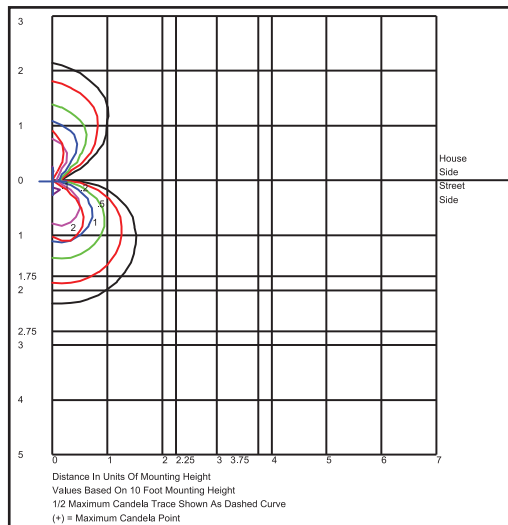

D-84w-CFL-HMWP-UD

Specifications subject to change without notice.