

PF80Q DuraLED Sculptor Open Large Round Post Top



Project Information	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard PF80Q Sculptor Architectural Open Large Round Post Top is available in Type III or V distributions with two lens options designed to replace HID lighting systems up to 1000w MH or HPS. The fixture mounts to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

HOUSING:

Die Cast Aluminum Housing, Integral Heat Sinking. Photocell Adaptable.

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

FINISH:

Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

LENS:

Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Array Lens to Seal LED Array

MOUNTING OPTIONS:

Accommodates "P3" 2 7/8" O.D. x 3" Tenons

DURALED LED:

Aluminum Boards

WATTAGE:

100w Array: 100w, System: 108w; (150-250w HID Equivalent)
176w Array: 176w, System: 190w (400-1000w HID Equivalent)

DRIVER:


Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV, 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

CONTROLS:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with DuraGuard Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

WARRANTY:

5-Year Warranty for -40°C to +50°C Environment.

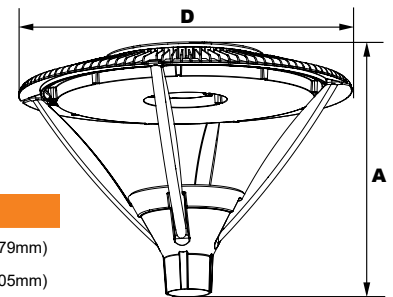

Dimensions

Diameter (D) 26 1/4" (679mm)
Height (A) 19 1/2" (505mm)

DuraLED TECHNOLOGY

See Page 2 for Projected Lumen Maintenance Table.

Complete Units
Ordering Information
Example: PF80QF1X176U5KCBS

PF80Q DuraLED Sculptor Open Large Round Post Top

PF80Q

Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
PF80Q= DuraLED Sculptor Open Large Round Post Top	C =Type III F =Type V	1X100 =100w 1X176 =176w	U =120-277V H =347-480V	3K =3000K* 4K =4000K 5K =5000K		B =Black C =Custom (Consult Factory)	
				*176w Type V Only			

C=Clear UV-Stabilized Polycarbonate Array Lens
L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens*
*Use with Type V Models Only

- P2AB**=PSRTN Tenon Adaptor, Black
- P2AC**=PSRTN Tenon Adaptor, Custom Color (Consult Factory)
- SF**=Single Fuse (120-277V Only)
- DF**=Double Fuse (120-277V Only)
- SP**=Surge Protection
- R3**=3-Pin Twist Lock Photocell Receptacle
- R5**=5-Pin Twist Lock Photocell Receptacle
- R7**=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle
- S2**=Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. (120-277V Only)
- S4**=Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', (120-277V Only)



Specifications subject to change without notice.

PF80Q DuraLED Sculptor Open Large Round Post Top



ACCESSORIES & REPLACEMENT PARTS:

Mounting Accessories (Order Separately, Field Installed)

PSRTN* Retrofit Tenon Adaptor, Die Cast with Powdercoat Finish, Hardware Included. Converts a 2 3/8" x 4" Pole Tenon to a 2 1/8" x 3" Tenon.

*Specify Color: B=Black, C=Custom (Consult Factory)



PSRTN

Accessories (Order Separately, Field Installed)

P18131 Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.

P18132 Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.

P18140 110-120VAC Instant Twist Lock Photocell

P18150 120VAC Time Delay Twist Lock Photocell

P18152 277VAC Time Delay Twist Lock Photocell

P18156 120-277VAC Universal Twist Lock Photocell

P18157 480VAC Time Delay Twist Lock Photocell. For 480V use only.



P18131



P18132



P18140



**P18150
P18152**



**P18156,
P18157**

Replacement Parts (Order Separately, Field Installed)

PF70ALL SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens

P17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz

P17123 Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz



P17117

P17123


EPA (EFFECTIVE PROJECTED AREA)

EPA (Sq. Ft.)	Weight (Lbs.)
1.80	32 Lbs


PF80Q DuraLED Sculptor Open Large Round Post Top



PHOTOMETRIC DATA

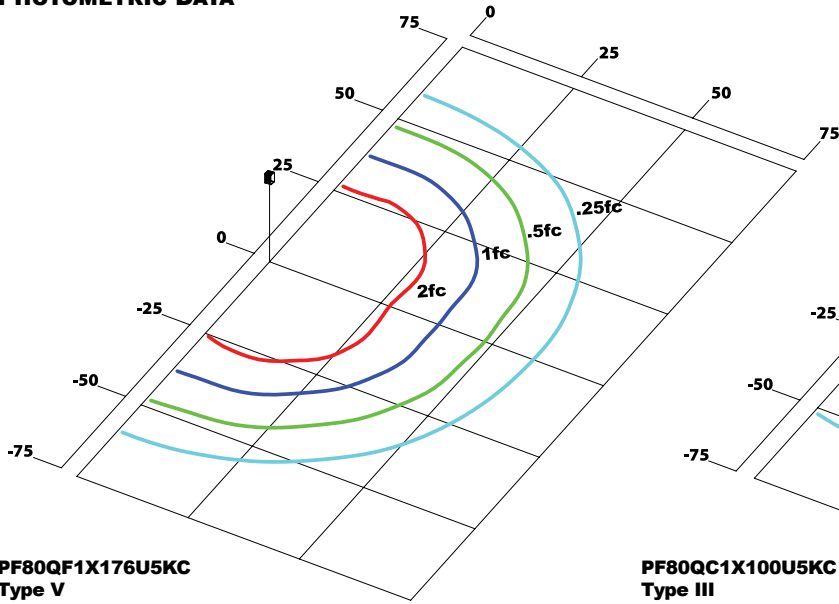

PF80QF1X176U5KC
Type V
 Grid in MH
 MH=25 Feet

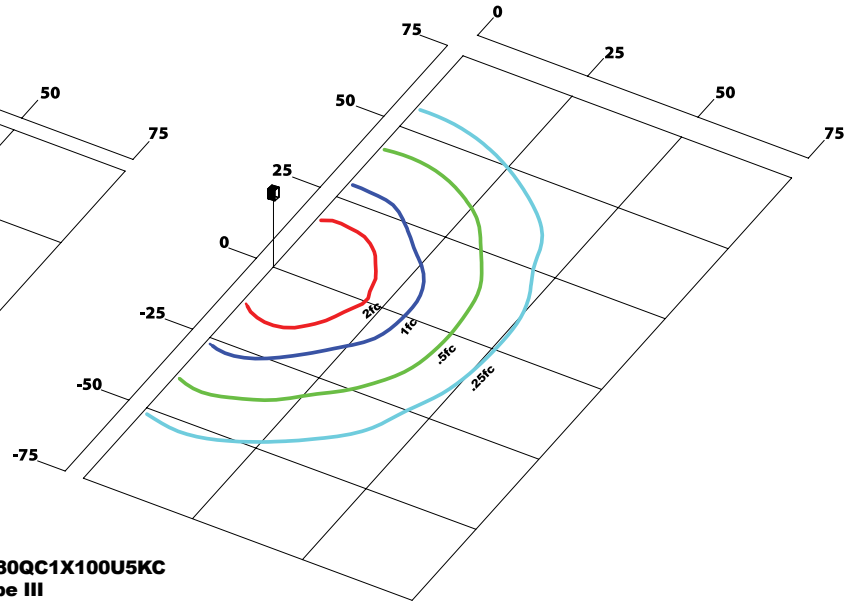

PF80QC1X100U5KC
Type III
 Grid in MH
 MH=25 Feet

PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
DuraLED 100w	525	108	Type III Clear	7,959	74	2	0	2	7,661	71	2	0	2	7,363	68	2	0	2
DuraLED 176w		190	Type III Clear	14,008	74	3	0	3	13,483	71	3	0	3	12,958	68	3	0	3
			Type V Clear	19,174	101	3	2	2	18,818	99	4	2	2	17,880	94	3	2	2
			Type V Opal	16,394	86	3	2	2	16,089	85	3	2	2	15,288	80	3	2	2

PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 190w	1.00	0.98	0.96	0.92	362,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.96	0.92	0.84	183,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.97	0.94	0.88	167,000

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.