

SMALL LED FLOOD



Replaces up to 70w Metal Halide!

IN STOCK!




Order # FL20L1X18U5KZK



DuraGuard
PRODUCTS INC.[®]
A QSSI Company

Find detailed spec sheets and more at www.duraguard.com

PHOTOMETRICS

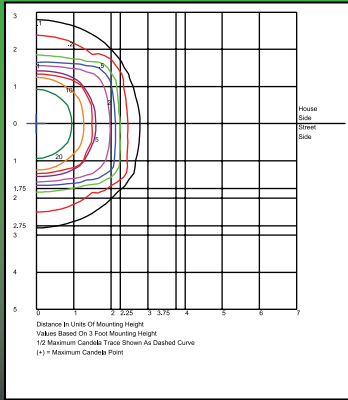

FL20L1X18U5K



No minimum order

Applications:

Building façade lighting, signs, landscape lighting

Housing:

Die cast aluminum housing and front frame with separate ballast compartment. Integral heat-dissipating fins for thermal management. 1/2" threaded aperture with liquid-tight connector. Powdercoat finish over a chromate conversion coating.

Lens:

Tempered clear glass lens.

Mounting:

Includes adjustable knuckle with 1/2" NPS threads.

LG Innotech LED COB:

Luminous Flux: 1590 Lumens

CRI: 84, CCT: 5000K

5-year Warranty

Beam Angle: 112°

Operating Temperature: -30 ~ 85°C

RoHS Compliant

Wattage:

LED: 1 x 18w

System: 21w

Driver:

Electronic driver, 120-277V, 50/60Hz

Power Factor: 99%

Listing & Ratings:

CSA: Listed for wet locations.

Options:

Dimmable Driver

Custom colors available upon request.

DuraGuard
PRODUCTS INC.®
A QSSI Company

Order Today!

West Coast Sales:

Phone: 800-736-7991

Email: josh@duraguard.com

East Coast Sales:

Phone: 678-860-9906

Email: rmiles@qssi.com

5 LOCATIONS
Vancouver, WA
Tampa, FL
Cerritos, CA
Walden, NY
Memphis, TN

Find detailed spec sheets and more at www.duraguard.com

021414