



FEATURES & APPLICATIONS

Features:

- Spun Aluminum One-Piece Exterior Housing/Reflector Combination
- 3/4" Threaded Hole for Malleable Hook (included) or Conduit Mounting
- Aluminum Reflector/Housing Combination
- Optional Tempered Clear Flat Glass Lens with Gasket Sold Separately. Glass Lens Cannot Be Used With Acrylic Refractors.
- CSA Listed for Dry Locations
- Custom Colors Available
- Incandescent Lamp Not Included

Applications:

High Bay Lighting

Accessories Sold Separately


Reflector Bay



RHB16



DIMENSIONS

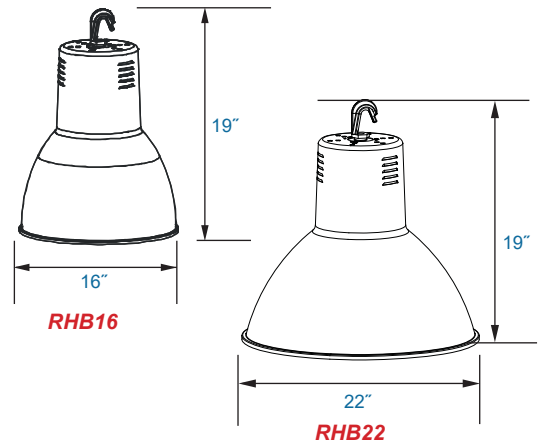

HIGH BAYS

ORDER INFORMATION

Typical Ordering Number:

D-200w-INC-RHB16

— —

1. Wattage/Lamp

Incandescent:
D-200w-INC

2. Fixture Type

16" Reflector Bay:
RHB16
22" Reflector Bay:
RHB22

3. Options

Accessories on following Page



ACCESSORIES

OPTIONS:

- 16FG, 22FG** = 16" & 22" Tempered Clear Flat Glass Lens.
- Glass lens cannot be used with acrylic refractors.
- 16CB, 22CB** = 16" & 22" Clamp Band
- 16WG, 22WG** = 16" & 22" Wireguard
- CPMH1** = Malleable Hook with 3/4" NPS Threads
- 3C** = Cord Set, Blunt Cut, 3', 16/3 600V STW Cord
- CS110** = Cord Set, 3-Prong Polarized, 3' Cord
- CS120** = Cord Set 120v Twist-Lock L5-15P Plug, 3' Cord
- CS240** = Cord Set 240v Twist-Lock L5-15P Plug, 3' Cord
- CS277** = Cord Set 277v Twist-Lock L7-15P Plug, 3' Cord



16FG
22FG



16CB
22CB



16WG
22WG



CPMH1



3C



CS110



CS120



CS240



CS277

PHOTOMETRICS

HIGH BAYS