

WPDLED Element Outdoor Decorative LED Wall Pack



Project Information	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard WPDLED Element Outdoor Decorative LED Wall Pack provides down lighting with a uniform distribution designed to replace compact fluorescent lighting systems. Typical wall mounted applications for variety of project types provides security lighting near doors and entrances with integral photocell or switching control. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

HOUSING:

Durable and Vandal-Resistant Die-Cast Aluminum Housing with 1/2" Coin Plug for Conduit. Includes Integrated Photocell, Switchable Between Photocell or Wall Switch Control. Low Profile, ADA Compliant.

LISTING & RATINGS:

UL: Listed for Wet Locations. IP65

FINISH:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

LENS:

UV-Resistant Prismatic UV-Stabilized Polycarbonate Lens

REFLECTORS:

Mirrored Reflector

MOUNTING OPTIONS:

Wall Mount Over a Recessed Junction Box or Use 1/2" Surface Conduit.

WATTAGE:


LED: 11w, System: 14w

DRIVER:

Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

CONTROLS:

Fixtures with Factory-Installed Photocell are Internally Wired for Switching. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

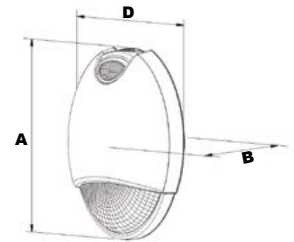

Dimensions

- Width (D)** | 6 1/4" (157mm)
- Length (B)** | 3 3/4" (98mm)
- Height (A)** | 10 1/2" (265mm)

DuraLED TECHNOLOGY

Complete Units
Ordering Information
Example: WPDLED10D5KZ

WPDLED Element Outdoor Decorative LED Wall Pack

WPDLED	14	D	5K	
Model	Wattage	Driver	CCT	Color
WPDLED = Element Outdoor Decorative LED Wall Pack	14 =14w	D =120-277V	5K =5000K	Z =Bronze W =White C =Custom (Consult Factory)



Specifications subject to change without notice.


WPDLED Element Outdoor Decorative LED Wall Pack



PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI	
				Lumens	LPW
LED 14w	700	14	Type IV	1,192	85

PHOTOMETRIC DATA

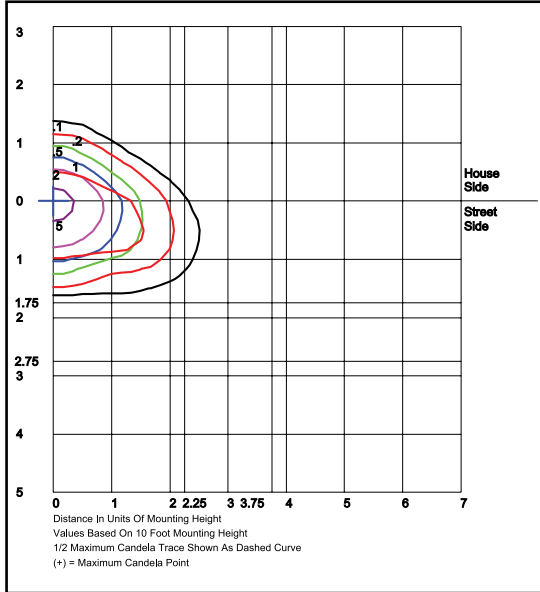

WPDLED14D5K
Type IV